


NF Series Non-Contact Backstop

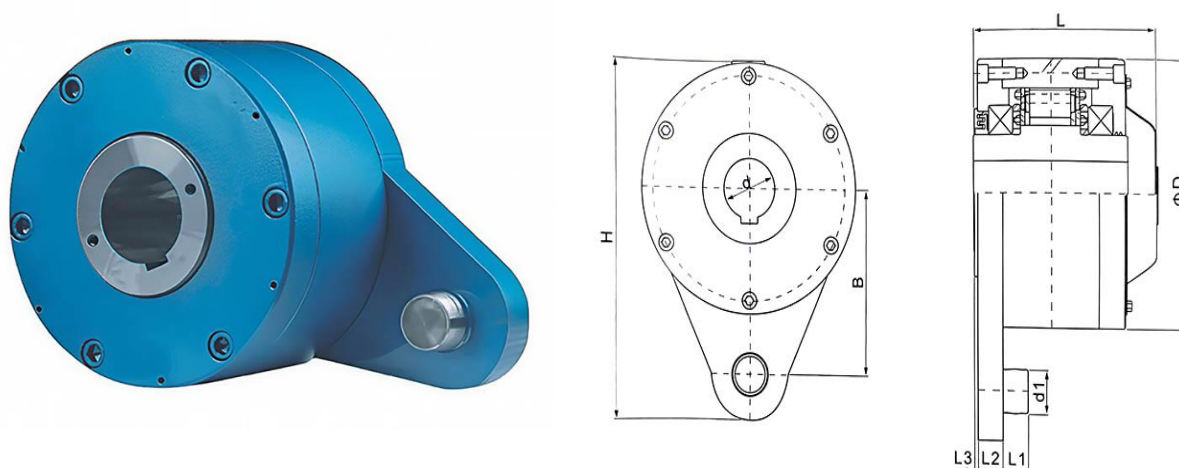

Main Technical Parameters Of NF Series Non - Contact Backstop

type	te N.m	r/min	r/min	Mounting Dimensions (mm)												kg
				dmax	dmin	smin	smax	D	d1	H	B	L	L1	L2	L3	
NF10	1000	450	1500	50	32	110	145	190	28	278	150	162	25	20	5	28
NF16	1600	450	1500	60	45	110	150	210	32	305	160	167	25	22	5	31
NF25	2500	425	1500	70	50	115	155	230	38	330	170	172	25	25	5	38
NF40	4000	425	1500	80	60	120	166	250	42	358	185	183	28	30	5	49
NF63	6300	400	1500	90	70	125	180	260	45	378	195	196	30	35	5	62
NF80	8000	400	1500	100	80	130	185	280	48	410	210	200	35	35	5	73
NF100	10000	400	1500	110	90	140	220	295	52	440	225	238	35	45	5	98
NF125	12500	375	1500	130	100	160	250	330	58	492	250	262	40	50	8	154
NF160	16000	375	1000	140	110	165	260	360	62	532	260	273	40	55	8	175
NF200	20000	375	1000	150	120	175	260	405	65	590	300	275	50	58	8	214
NF250	25000	350	1000	160	130	180	270	440	70	464	335	285	50	63	8	256

Notes:

1. In the table, "Smin" and "Smax" are the minimum and maximum shaft - extension lengths required for mounting the backstop, respectively.
2. Preferred series for d: 32, 38, 40, 42, 45, 48, 50, 55, 60, 65, 70, 75, 80, 85, 90, 95, 100, 110, 120, 130, 140, 150, 160.
3. The inner bore tolerance is E7; the recommended fitting tolerance is E7/h6.
4. The dimensions and tolerances of the keyway shall conform to D10 specified in GB/T1095-2003.